




- Customer Friendly Operation
- Precise Metrology Equipment
- High Performance Hydraulic & Electronic Components
- High Quality Explosion Proof Motor
- Specially designed reusable (cleanable) fuel filtering cartridges
- Available as a dispenser or pump
- Suitable for diesel
- Works well in harsh Australian conditions
- NMI Approved



Technical Specifications

Accuracy	± 0.25%
Flow Rate	80L/min
Ambient Temperature	-25°C ≈ +55°C
Relative Humidity	0% - 95%
Unit Noise Rate	< 70dB
Inlet Vacuum Rate (Suction Pump)	≥ 54kPa
Communication Protocols Supported	Sanki RS485, NZPP (PEC/Compac), Gilbarco*
Power Supply	AC 220V, AC380V (-15% ≈ +10%)
Sale Digits	7 (0.00 – 99999.99) Decimal Adjustable
Volume Digits	6 (0.00 – 9999.99) Decimal Adjustable
Unit Price Digits	5 (0.00 – 999.99) Decimal Adjustable
NMI Approval Number	5/6A/231 -8


*Contact us to confirm controller compatibility

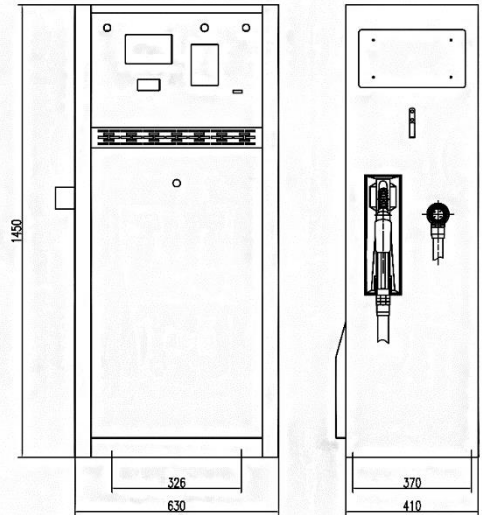

Models

Model	Type	Nozzles	Products	Flow Meters	Displays	Package Size (mm)	Gross Weight
SK52GF111B	Pump	1	1	1	2	768 * 546 * 1570	130kg
SK52QF111B	Dispenser	1	1	1	2	768 * 546 * 1570	104kg

Footprint – Pump

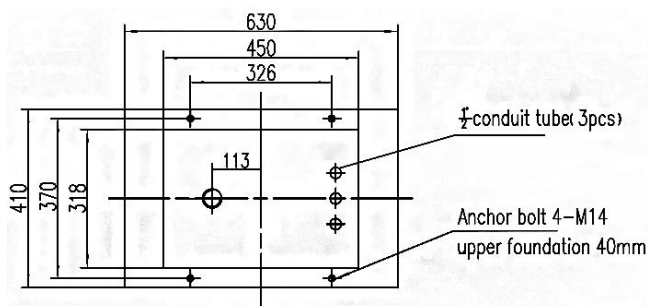

Footprint - Dispenser

